



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated 20 May 2003

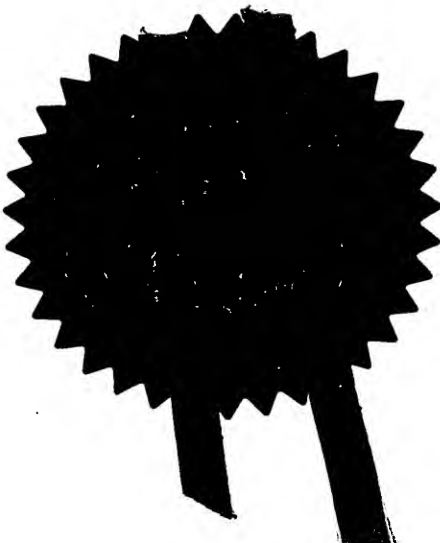



21

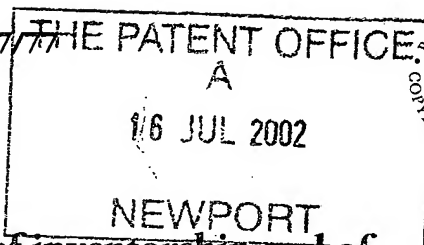

7/77

Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

DY3005

2. Patent application
(if you know it)

0216482.0

16 JUL 2002

3. Full name of the or of each applicant

ROLLS-ROYCE PLC

4. Title of the invention

POWER GENERATION

5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent

BY VIRTUE OF AN AGREEMENT DATED 1 JULY 2002

6. How many, if any, additional Patents Forms 7/77 are attached to this form?
(see note (c))

1

7.

I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.

Signature

Date

M A GUNN

15.7.2002

8. Name and daytime telephone number of person to contact in the United Kingdom

T A LITTLE

01332 249397

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

JOHN RICHARD WEBSTER
396 BURTON ROAD
DERBY
DE23 6AF

3325701002


Patents ADP number (if you know it):

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Reminder

Have you signed the form?

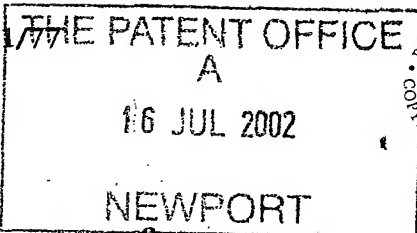

16JUL02 E733662-1 000370
P01/7700 0.00-0216482.0

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

DY3005

0216482.0

2. Patent application number

(The Patent Office will fill in this part)

16 JUL 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ROLLS-ROYCE PLC
65 BUCKINGHAM GATE
LONDON
SW1E 6AT

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

ENGLAND

3970002

4. Title of the invention

POWER GENERATION

5. Name of your agent (if you have one)

M A GUNN

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ROLLS-ROYCE plc
PATENTS DEPARTMENT
PO BOX 31
DERBY
DE24 8BJ

Patents ADP number (if you know it)

3962001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

9

Claim(s)

4

Abstract

1

Drawing(s)

3 + 3

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

2

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

1

CF

Any other documents (please specify)

DEPOSIT ACCOUNT FEE SHEET /

11.

I/We request the grant of a patent on the basis of this application.

Signature

M A GUNN

Date

15.7.2002

12. Name and daytime telephone number of person to contact in the United Kingdom

T A LITTLE

01332 249397

Warning


After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

ROLLS-ROYCE plc

CASE NO: DY3005

RR TITLE: 

APPLICATION NO:

DATED: 16 JULY 2002

FIRST APPLICATION

DRAFTED BY: S&P for TAL

PATENTS ACT 1977

SPECIFICATION

POWER GENERATION

Power Generation

The present invention relates to power generation
5 using a lifting body in a fluid flow.

Power is generally obtained from wind using windmills
which are large relatively expensive structures. Power is
obtained from water using hydro-electric dams. It would be
desirable to have alternative, less expensive mechanisms
10 for obtaining power from fluid flow.

US 6254034 describes a system for electricity
generation in which wind blows a tethered tractor kite
downwind. The kite has a single tether wound around a
windlass drum, which is connected to an electrical
15 generator and a motor. The cycle for generation of
electrical power involves a downwind travelling phase and
an upwind travelling phase. In the downwind phase, the
downwind travelling kite generates power. It pulls its
tether off the windlass drum and drives the electrical
20 generator. In the upwind travelling phase the kite is
controlled to change its shape or pitch by special
mechanisms in the kite itself and the motor revolves the
drum to reel in the tether. This system has several
drawbacks. It requires an electric motor for winding the
25 kite in and a special kite tethered by a single tether that
can be controlled to change its shape or pitch. It is
unsuitable for generating power from water flow.

According to one aspect of the present invention there
is provided a power generator comprising: a lifting body
30 for suspension in a moving fluid; a control station; and
at least two tethers for tethering the lifting body to the
control station, wherein the control station is arranged to
transform oscillating tension in the tethers produced by an
oscillating movement of the lifting body into mechanical
35 motion.

According to another aspect of the present invention

there is provided a control station for a power generator using a lifting body in a fluid stream comprising: at least two tied points for the connection of at least two tethers for tethering the lifting body to the control station; and
5 means for transforming oscillating tension in the tethers produced by an oscillating movement of the lifting body into mechanical motion. *

According to one aspect of the present invention there is provided a method of extracting power from a fluid flow
10 comprising the steps of: suspending a lifting body in the fluid flow using at least two tethers and transforming an oscillating tension in the tethers produced by an oscillating movement of the lifting body into mechanical motion.

15 Embodiments of the invention provide significant advantages. The lifting body is of very simple construction and does not need any special mechanisms to control its pitch or shape. All the mechanisms for controlling the pitch of the lifting body and generating power are located
20 in the control station which can be located in an easily accessible position. The control station may be small and easily portable. It can be of a simple and robust construction. The power generator is particularly useful in the Third World.

25 For a better understanding of the present invention and to understand how the same may be brought into effect, reference will now be made by way of example only to the following drawings in which:

Figure 1 illustrates a power generator according to
30 one embodiment of the present invention;

Figures 2a, 2b, 2c and 2d illustrate the cyclic rotation of the flywheel used for power generation;

Figures 3a, 3b, 3c and 3d illustrate the oscillation and reciprocation of the connecting rod head attached to
35 the flywheel;

Figures 4a, 4b, 4c and 4d illustrate the oscillation

of the lifting body tethered to the oscillating connecting rod head;

Figure 5a illustrates the variation of the pitch angle (α) of the lifting body with the angle of rotation (β) of the flywheel;

Figure 5b illustrates the variation of the tension in the tethers of the lifting body with the angle of rotation (β) of the flywheel; and

Figure 5c illustrates the variation of the instantaneous work done with the angle of rotation (β) of the flywheel.

Figure 1 illustrates a power generator 2 comprising a lifting body 4, a control station 30 and first and second tethers 6 & 8 connecting the lifting body to the control station.

The lifting body is in a fluid flow F and the control station 30 is resting on an easily accessible surface 32, such as the ground, the deck of a boat or the top of a building. The control station 30 remains stationary on the surface 32 and the fluid flow F lifts and drags the lifting body 4. The first tether 6 and the second tether 8 are of fixed length and, in use, are under tension caused by the lift and drag of the lifting body 4. The points at which the first tether 6 and the second tether 8 connect to the lifting body 4 lie in a substantially straight line connecting the leading and trailing edges of the lifting body 4. The tethers 6, 8 are used to alter the angle of incidence (or pitch) of the lifting body 4 and hence the lift and drag.

The control station 2 controls pitch of the lifting body 4 and extracts power from the oscillatory modulation in the tension in the tethers 6, 8 caused by the variation in lift and drag. The control station 30 comprises a flywheel 26 mounted for rotation in a counter clockwise direction which stores the generated power. A 'T' shaped connecting rod 16 is connected at one end to the side of

the flywheel at a distance from the flywheel's axis of rotation by a crank pin 28. The 'T' shaped connecting rod 16 has a connecting rod head 14 at its other end. The connecting rod head 14 has a first tie point 10 and a second tie point 12. In use, the first tether 6 is connected to the first tie point 10 and the second tether 8 is connected to the second tie point 12. The connecting rod head 14 is constrained to move along a line of constraint 22, by the constraining link 20 which is connected at one end to a fixed pivot point 18 and at the other end to the connecting rod via a pivoting connection 24. The line of constraint 22 will be curvilinear but will approximate to a rectilinear line for embodiments in which the constraining link 20 is long. For ease of illustration, the line of constraint in Figure 1, has been shown as a rectilinear line. Other mechanisms can be used to control the rocking and translational movements which respectively provide control and power extraction.

The operation of the power generator 2 can be understood by referring to Figs 2a to 4d. Figures 2a, 2b, 2c and 2d illustrate the cyclic rotation of the flywheel 26. The position of the flywheel 26 within a rotation is denoted using the angle of rotation β which is 270 degrees, 0 degrees, 90 degrees and 180 degrees respectively in Figures 2a, 2b, 2c and 2d. Figures 3a, 3b, 3c and 3d illustrate the oscillation and reciprocation of the connecting rod head 14 attached at the crank pin 28 to the flywheel 26 by the connecting rod 16. The oscillation/rocking of the connecting rod head 14 provides control of the pull generated by the lifting body and the reciprocating/translational movement of the connecting rod 16 provides for power extraction. When β is 270 degrees, the connecting rod head 14, as shown in Fig 3a, is at its maximum displacement away from the flywheel 26 and is tilted at an intermediate angle so that the first tie point 10 leads the second tie point 12. When β is

0/360 degrees, the connecting rod head 14, as shown in Fig 3b, is at an intermediate displacement away from the flywheel 26 and is tilted at a minimum angle. In this particular embodiment, the minimum angle is zero so that the first tie point 10 is level with the second tie point 12. When Beta is 90 degrees, the connecting rod head 14, as shown in Fig 3c, is at a minimum displacement away from the flywheel 26 and is tilted at an intermediate angle so that the first tie point 10 leads the second tie point 12. When Beta is 180 degrees, the connecting rod head 14, as shown in Fig 3d, is at an intermediate displacement away from the flywheel 26 and is tilted at a maximum angle so that the first tie point 10 leads the second tie point 12.

As the connecting rod head 14 moves towards the flywheel (return-stroke), it moves from the position illustrated in Fig 3a through the position illustrated in Fig 3b to the position illustrated in Fig 3c. It moves from being at an intermediate angle to being flat and then returns to the intermediate angle. As the connecting rod head 14 moves away from the flywheel (out-stroke), it moves from the position illustrated in Fig 3c through the position illustrated in Fig 3d to the position illustrated in Fig 3a. It moves from being at an intermediate angle to being at a maximum angle and then returns to the intermediate angle.

Figures 4a, 4b, 4c and 4d illustrate the oscillation of the lifting body 4 tethered to the oscillating connecting rod head 14. The lifting body and the connecting rod head 14 oscillate in phase.

When Beta is 270 degrees, the pitch angle (alpha) of the lifting body 4, as shown in Fig 4a, is at an intermediate value. The lift and drag created by the lifting body 4 in the fluid flow F is at an intermediate value, and the tension in the tethers 6,8 is at an intermediate value.

When Beta is 360 degrees, the pitch angle (alpha) of

the lifting body 4, as shown in Fig 4b, is at a minimum (zero) value. The lift and drag created by the lifting body 4 in the fluid flow F is at an minimum value, and the tension in the tethers 6, 8 is at a minimum value.

5 When Beta is 90 degrees, the pitch angle (α) of the lifting body 4, as shown in Fig 4c, is at an intermediate value. The lift and drag created by the lifting body 4 in the fluid flow F is at an intermediate value, and the tension in the tethers 6,8 is at an
10 intermediate value.

When Beta is 180 degrees, the pitch angle (α) of the lifting body 4, as shown in Fig 4d, is at a maximum value. The lift and drag created by the lifting body 4 in the fluid flow F is at a maximum value, and the tension in
15 the tethers 6, 8 is at a maximum value.

As the lifting body moves from the position illustrated in Fig 4a through the position illustrated in Fig 4b to the position illustrated in Fig 4c, the tension in the tethers 6, 8 is modulated. It starts with an
20 intermediate value then achieves a minimum value and finishes with an intermediate value.

As the lifting body 4 moves from the position illustrated in Fig 4c through the position illustrated in Fig 4d to the position illustrated in Fig 4a, the tension
25 in the tethers 6, 8 is modulated. It starts with an intermediate value, then achieves a maximum value and finishes with at an intermediate value.

The oscillation of the pitch angle (α) of the lifting body 4 with the rotation angle (Beta) of the
30 flywheel is illustrated in Fig 5a and the oscillation of the tension in the tethers 6, 8 of the lifting body 4 with the rotation angle (Beta) of the flywheel 26 is illustrated in Fig 5b. Figure 5c illustrates the variation of the instantaneous work done with the rotation angle (Beta) of
35 the flywheel.

The references (a) on Figs 5a, 5b and 5c illustrate

the pitch angle (α), the tension in the tethers 6, 8 and the instantaneous work done when Beta is 270 degrees. The references (b) on Figs 5a, 5b and 5c illustrate the pitch angle (α), the tension in the tethers 6, 8 and the instantaneous work done when Beta is 0 degrees. The references (c) on Figs 5a, 5b and 5c illustrate the pitch angle (α), the tension in the tethers 6, 8 and the instantaneous work done when Beta is 90 degrees. The references (d) on Figs 5a, 5b and 5c illustrate the pitch angle (α), the tension in the tethers 6, 8 and the instantaneous work done when Beta is 180 degrees.

During the return-stroke (a), (b), (c) work is done by the flywheel. This work is provided by the angular momentum of the flywheel. During the out-stroke (c), (d), (e) work is done on the flywheel. The work done on the flywheel during the out-stroke (illustrated by area A in Fig. 5c) is greater than the work done by the flywheel during the return-stroke (illustrated by area B in Fig. 5c). There is therefore a net energy gain over each rotation of the flywheel, which can be used to drive an electricity generator, pump or other device.

The power generator 2 transforms energy in the fluid flow F into a rotation of the flywheel 26. The rotation of the flywheel 26 can be used to produce electricity, operate a pump or produce reciprocating motion.

In the foregoing, the first tether 6 and the second tether 8 are attached to a single lifting body 4. In other embodiments, multiple lifting bodies 4 can be stacked and each attached to the first tether 6 and the second tether 8.

In the foregoing the control station 30 has a single flywheel 26 and two tethers 6, 8. In other embodiments, the control station 2 may have multiple flywheels 26 connected together using cranks. Each of the multiple flywheels 26 would be attached to at least one lifting body 4 by two tethers 6, 8.

The fluid flow may be erratic, for example in gusting winds. To improve operability in such conditions, embodiments of the invention may have a deformable lifting body 4. Alternatively, a suspension is used. The suspension preferably has a spring or other elastic element between the connecting rod head 14 and each tether 6, 8. A damper may be attached in parallel to the spring.

In other embodiments, a slow response damper may be incorporated in the connecting rod above the pivoting connection 24 to accommodate changes in kite height with wind speed.

In other embodiments, the tethers are deformable to provide adaptation to different wind conditions and/or the 'T' shaped connecting rod 16 is deformable (with appropriate damping) to provide adaptation to different wind conditions.

In other embodiments, the constraining link 20 may be extendible. In Figure 1, the constraining link has a first length so that the connecting rod head 14 is constrained to move along a line of constraint 22 to the left of the axis of the flywheel 26. This allows the power generator 2 to extract power from fluid flow in the direction right to left. According to the current embodiment, the constraining link may be extended to a second length, longer than the first length, so that the line of constraint 22 is positioned to the right of the axis of the flywheel 26 and the power generator 2 is able to extract power from a fluid flow from left to right. This is particularly useful for extracting power from tidal water movements.

In one application of embodiments of the invention, the fluid flow is wind and the lifting body 4 is an aircraft such as a kite or aerofoil. The control station 30 is preferably mounted on bearings so that it can rotate as the wind direction changes. The control station 30 is arranged with the axis of rotation of the flywheel 26

vertical and the tethers in a roughly vertical plane. The aircraft may comprise a lighter than air structure (helium filled) to prevent collapse and maintain altitude when there is no wind and help maintain lift during operation.

5 In another application of embodiments of the invention, the fluid flow is free streaming water which may be found in a river, an estuary, tidal flow or possibly in gross sea movements and the lifting body 4 is an otter board. When the water is provided by a river, the control
10 station 30 is preferably placed on a river bank with the axis of rotation of the flywheel 26 vertical and the tethers in a roughly vertical plane. The otter board remains permanently under the water surface and is given lift by buoyancy in the otter board or by using separate
15 floats.

In another application of embodiments of the invention, the fluid flow is free streaming water which may be found in a river, an estuary, tidal flow or possibly in gross sea movements and the lifting body 4 is an otter
20 board. When the water is provided by a river, the control station 30 is preferably placed on a pontoon or moored raft in the river with the axis of rotation of the flywheel 26 horizontal and the tethers in a roughly horizontal plane. The otter board remains under the water surface for the
25 out-stroke but floats on the surface of the water for at least part of the return-stroke to significantly reduce drag on this part of the cycle.

Whilst endeavouring in the foregoing specification to draw attention to those features of the invention believed
30 to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

Claims

1. A power generator comprising:
a lifting body for suspension in a moving fluid;
5 a control station; and
at least two tethers for tethering the lifting body to
the control station,
wherein the control station is arranged to transform
oscillating tension in the tethers produced by an
10 oscillating movement of the lifting body into mechanical
motion.
2. A power generator as claimed in claim 1 wherein the
tethers are of fixed length and fully extended in use.
3. A power generator as claimed in claim 1 or 2 wherein
15 the control station is arranged to control the oscillatory
motion of the lifting body using the at least two tethers.
4. A power generator as claimed in claim 1, 2 or 3
wherein the control station is arranged to control the
pitch of the lifting body using the at least two tethers.
- 20 5. A power generator as claimed in any preceding claim
wherein the control station comprises tied points for
attaching the tethers and is arranged to oscillate the tied
points of the tethers.
6. A power generator as claimed in claim 5 wherein the
25 control station is additionally arranged to reciprocate the
tied points of the tethers.
7. A power generator as claimed in any preceding claim
wherein the control station has a first tied point for
connection to a first tether and a second tied point for
30 connection to a second tether wherein the control station
is arranged such that in use, as the lifting body moves in
a first direction towards the control station, the first
tied point moves faster than second tied point in the first
direction and then the second tied point moves faster than
35 first tied point in the first direction, and as the lifting
body moves in a second direction away from the control

station the first tied point moves faster than second tied point in the second direction and then the second tied point moves faster than first tied point in the second direction.

5 8. A power generator as claimed in any preceding claim wherein the control station has a first tied point for connection to a first tether and a second tied point for connection to a second tether wherein the control station is arranged such that in use, as the lifting body moves in
10 a first direction towards the control station, the first tied point moves further than second tied point in the first direction and then the second tied point moves further than first tied point in the first direction, and as the lifting body moves in a second direction away from
15 the control station the first tied point moves further than second tied point in the second direction and then the second tied point moves further than first end point in the second direction.

9. A power generator as claimed in any preceding claim
20 wherein the control station is arranged such that, in use, it oscillates the pitch angle of the lifting body.

10. A power generator as claimed in any preceding claim wherein the control station comprises a flywheel.

11. A power generator as claimed in claim 9 wherein the
25 flywheel is arranged to pull the lifting body towards the control station.

12. A power generator as claimed in any preceding claim wherein the control station comprises a crank.

13. A power generator as claimed in claim 12 wherein the
30 tethers are extendible and/or the crank is deformable to provide adaptation to different wind conditions.

14. A power generator comprising:
a lifting body for suspension in a moving fluid;
a control station; and
35 at least two tethers for tethering the lifting body to the control station, wherein the control station is

arranged to provide rocking motion for control of the pull generated on the tethers by the lifting body and to provide a translational motion for extracting power from the change of pull in the tethers.

5 15. A power generator as claimed in claim 14 wherein the control station comprises a 'T'-shaped connecting rod for providing the rocking motion and the translational motion.

16. A control station for a power generator using a lifting body in a fluid stream comprising:

10 at least two tied points for the connection of at least two tethers for tethering the lifting body to the control station; and

means for transforming oscillating tension in the tethers produced by an oscillating movement of the lifting
15 body into mechanical motion:.....

17. A control station for a power generator using a lifting body in a fluid stream comprising:

at least two tied points for the connection of at least two tethers for tethering the lifting body to the
20 control station; and

means for providing a rocking motion to control the pull generated on the tied points and for providing a translational motion to extract power from the change of pull on the tied points.

25 18. A method of extracting power from a fluid flow comprising the steps of:

suspending a lifting body in the fluid flow using at least two tethers; and

transforming an oscillating tension in the tethers
30 produced by an oscillating movement of the lifting body into mechanical motion.

19. A method of extracting power from a fluid flow comprising the steps of:

suspending a lifting body in the fluid flow using at
35 least two tethers;

providing a rocking motion to control the pull

generated on the tethers by the lifting body; and

providing a translational motion for extracting power from the change in pull in the tethers.


20. A power generator substantially as hereinbefore
5 described with reference to and/or shown in the
accompanying drawings.

21. A control station for a power generator using a
lifting body in a fluid stream, substantially as
hereinbefore described with reference to and/or shown in
10 the accompanying drawings.

22. A method of extracting power from a fluid flow
substantially as hereinbefore described with reference to
and/or shown in the accompanying drawings.

ABSTRACTPower Generation

5 A power generator comprising: a lifting body for
suspension in a moving fluid; a control station; and at
least two tethers for tethering the lifting body to the
control station. The control station is arranged to
transform oscillating tension in the tethers produced by an
10 oscillating movement of the lifting body into mechanical
motion.

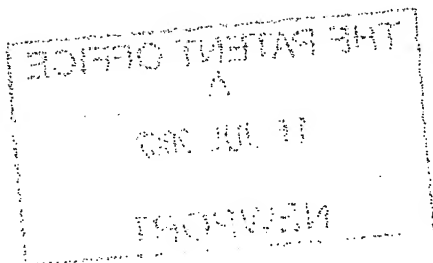

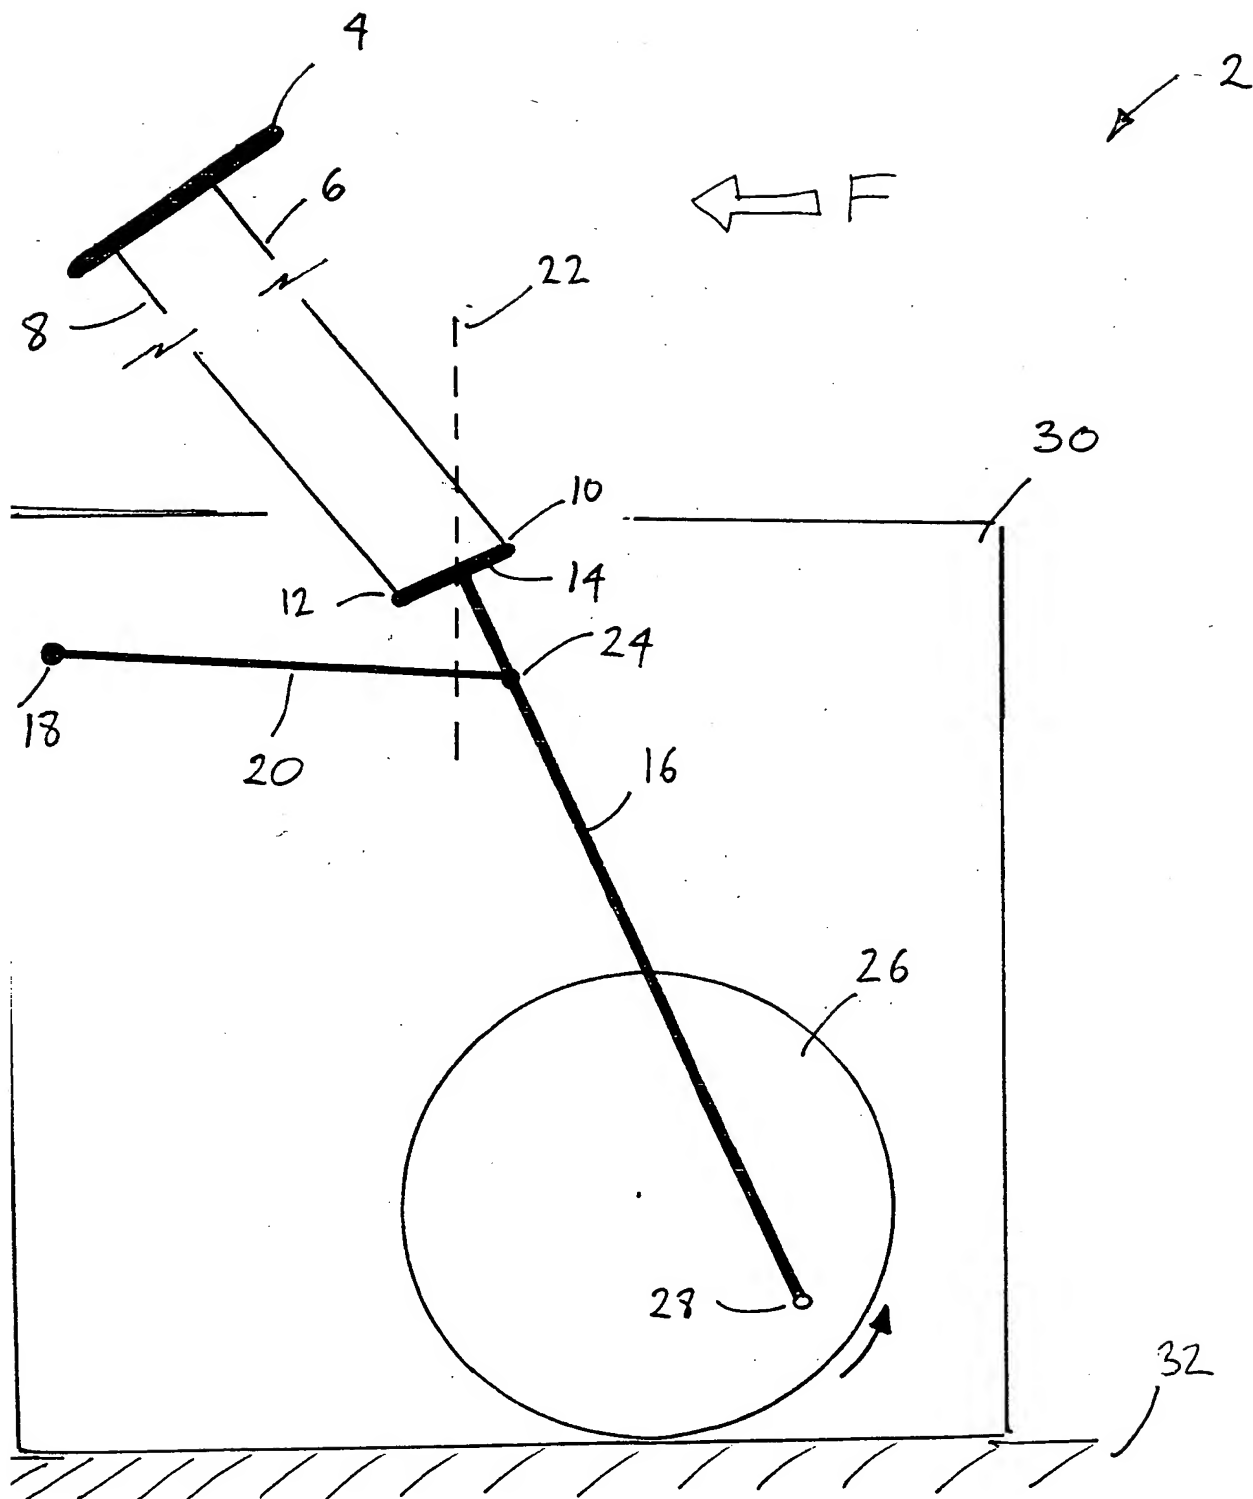














Fig 1

β

FLYWHEEL

ANGLE & DISPLACEMENT OF

ANGLE α OF LIFTING OBJECT

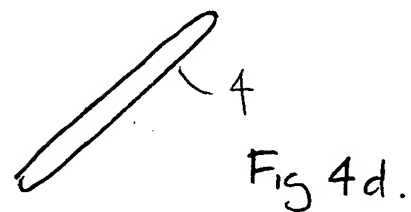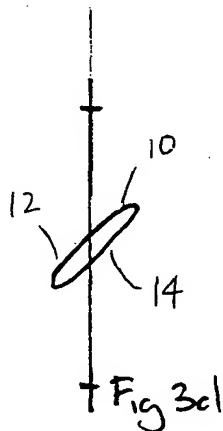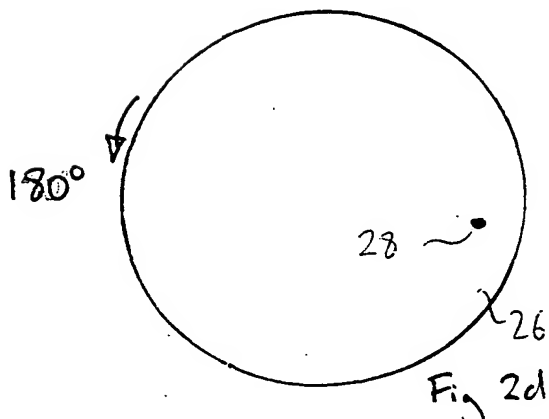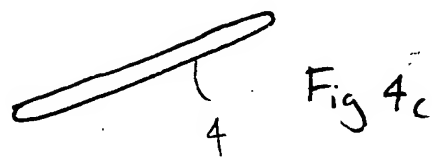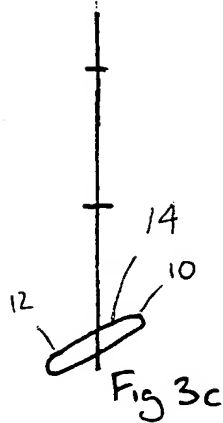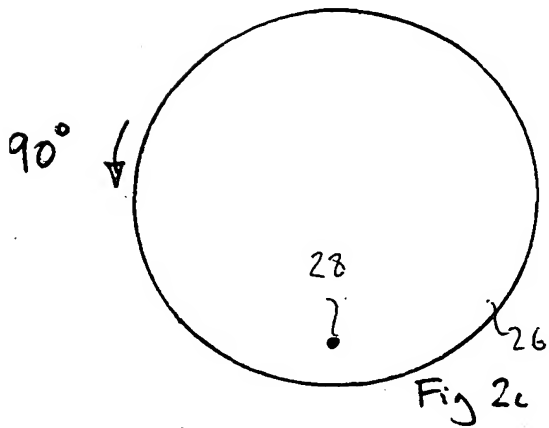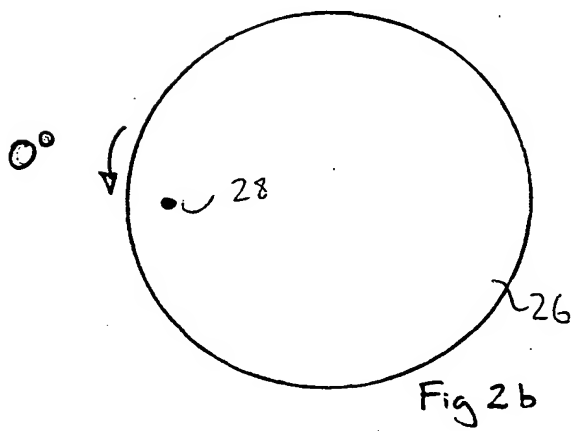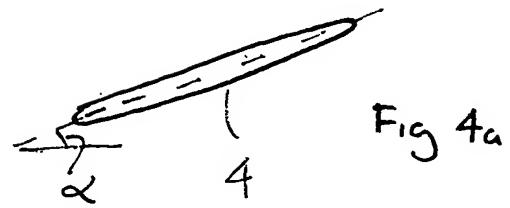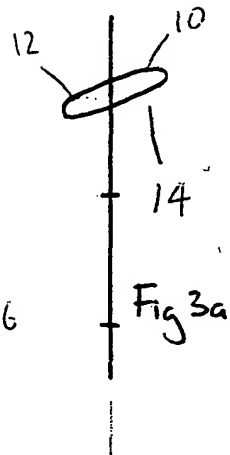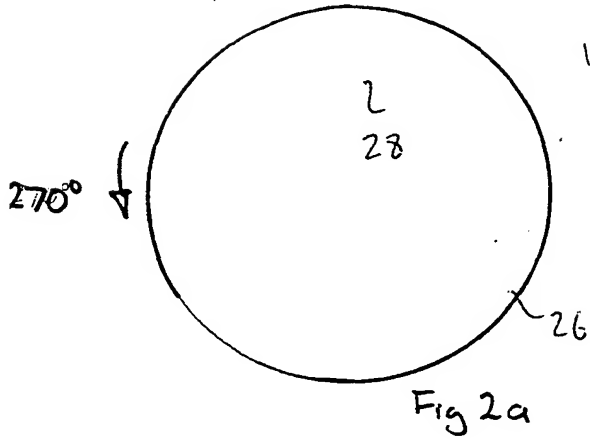



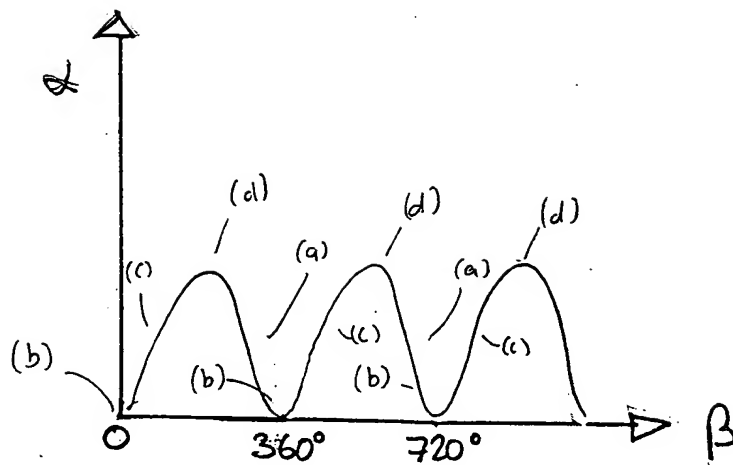


Fig 5a

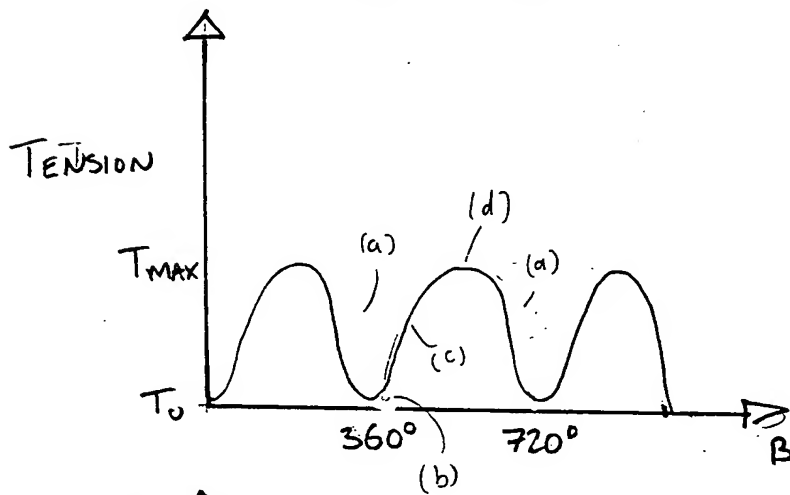


Fig 5b

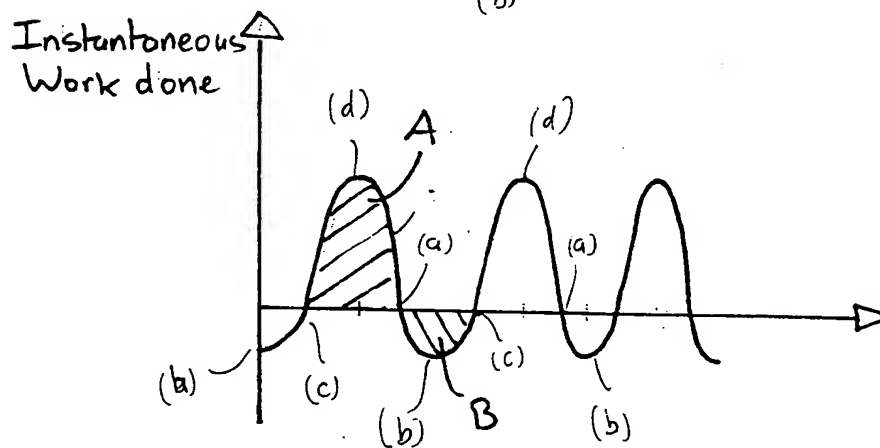


Fig 5c

